



WALL MOUNT 1 CHANNEL CONTROLLER

MODEL TG-1GWA/V70




- ◆ Best seller simple model
- ◆ LED Bar-graph Green and Red color indicator
- ◆ 4–20mA DC 1 channel input
- ◆ Output
 - Isolated 4 – 20 mA DC output
 - Alarm 1, 2 and Error relay contacts
 - Local audio & visual alarm
- ◆ AC 100 – 240 V operation

Specification

Model	TG-1GWA/V70
Input signal	4-20mA / 1 channel
Display	20 dot LED bar graph
Alarm signal	Red lamp and buzzer
Analog output	DC 4 - 20mA (900Ω impedance)
Alarm relay contacts	A1: dry c, A2: dry c, Err: dry b (fail safe action)
Capacity of relay contacts	AC 125V, 0.4A max (resistive load)
Operating Temp. / Humidity	0 - 40°C/ 20 - 80% RH (no condensing)
Mounting style	Wall mount
Power requirement	AC 100 - 240V
Power consumption	Approx. 10 W (controller only)
Dimensions (mm)	Approx. 125(W) × 175(H) × 75(D)
Weight	Approx. 1 kg
Mounting dimensions (mm)	110 (W) × 160 (H)

Dimensions

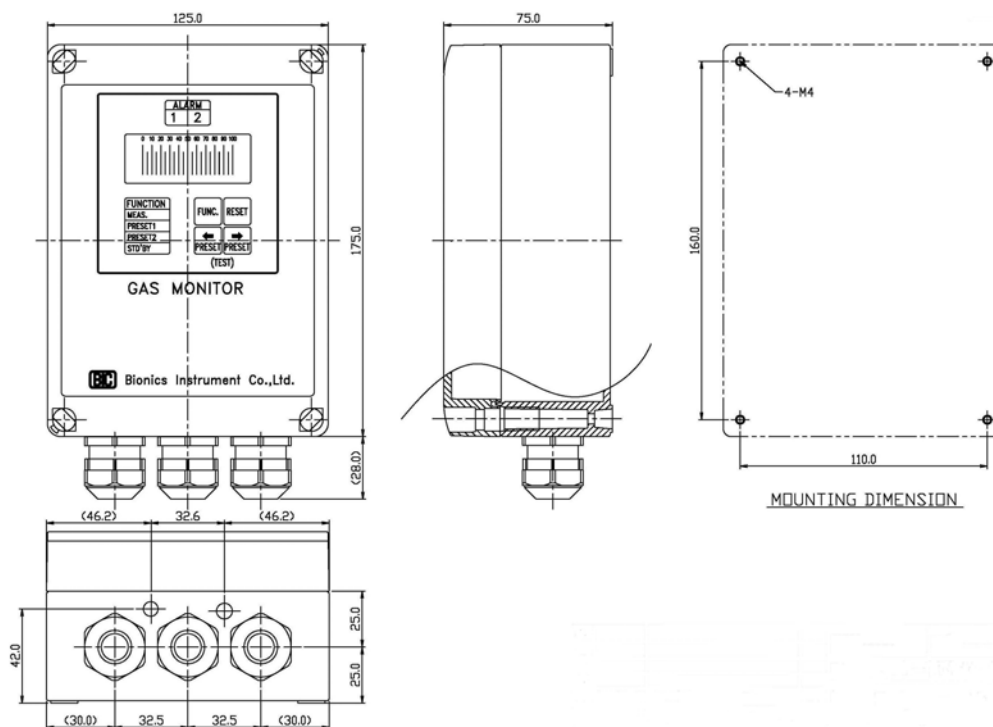

Unit: mm

※We reserve the right to change specifications without notice.

Bionics Instrument Co., Ltd.

6-1254-2 Shimizu, Higashi-yamato, Tokyo, 207-0004 Japan
 TEL: +81-42-561-4856 FAX: +81-42-565-3950
 e-mail: trade@bionics-japan.co.jp URL: <http://www.bionics-japan.co.jp>

Bionics Instrument Europe B.V.

Maxwellstraat 7, 1704 SG Heerthugowaard, The Netherlands
 TEL: +31-72-576 5630 FAX: +31-72-572 1818
 e-mail: sales@bionics-europe.com URL: <http://www.bionics-europe.com>

PureAire Monitoring Systems Inc.

557 Capital Drive, Lake Zurich, IL 60047, USA.
 TEL: +1-847-726-6000 FAX: +1-847-726-6051 Toll Free: 888-788-8050
 e-mail: info@pureaire.net URL: <http://www.pureairemonitoring.com>

Global Bionics Trading Corp.

No.18, Alley 29, Lane 335, Chenggong Rd., Hukou Township, Hsinchu County 30345, Taiwan.
 TEL: +886-3-553-8986 FAX: +886-3-553-8987
 e-mail: gbionics@ms56.hinet.net URL: <http://www.bionics.com.cn>