

- High integrity system
- Flammable, oxygen or toxic gases
- Wide range of enclosures, wall-panel mount, desktop or floor standing
- 3 adjustable alarm trip points
- 3 alarm relays per module
- Unlimited number of sensor points
- Standby battery charger module
- High integrity system
- 4 - 20mA output per module



Application

The GDS 2010 has been designed with features that will provide an effective response to the detection and control of gas hazards in a wide range of industrial environments from boiler plant rooms to offshore petrochemical installations.

The system is offered in a wide range of enclosures, from single module din rail mounting to multi-channel interconnected 19" rack based tower systems of unlimited size.

Each alarm module operates independently having alarm status indicators, sounder and three alarm levels with individual relays for the control of remote safety systems. 4-20mA or 0-10V outputs are available for use in proportional control systems such as speed control of extractor fans.


Common alarm relays and indicators are available via an optional facilities module which can be plugged into any available module socket on the system. The facilities module can also be used remotely as a control and status indicator panel, having built-in sounder with sounder accept and alarm reset functions.

The advanced features designed into the GDS2010 system ensure ease of maintenance and provide the highest integrity rating, with the minimum loss of sensor cover should a fault condition occur.


- Detector Module**
- 1 to 14 per 19" tray
 - Combustible – % L.E.L
 - Toxic – ppm
 - Oxygen – % Vol
- Measuring Range**
- Digital Display
 - Power indicator – Green L.E.D
 - Alarm Relays Inhibit – Amber L.E.D
 - Alarms Lo-Hi-Red L.E.D (Alarms 1 & 2)
 - Overrange-Red L.E.D (Alarm 3)
 - Fault – Amber L.E.D
- Indicators**
- Alarms Lo, Hi SPCO N/D or N/E latched / unlatched
 - Fault SPCO N/D or N/E latched/unlatched
 - All relays rated 5A/230vAC
 - Alarm relays, inhibit switch
- Relays**
- Alarms 1,2,3, Fault Disable option
- Audible Alarm**
- 4-20mA –250 Ω
 - 0-10v – 1K Ω
- Analogue Output**
- 4-20mA – 2/3 wire
 - Bridge type 3 wire-mv
- Sensor Inputs**

- Facilities Module**
- 1 per System
 - Power-Green LED
 - Alarms Lo, Hi, Overrange-Red LED
 - Fault-Amber LED
- Indicators**
- Alarms Lo, Hi, Overrange, Fault, SPCO
 - N/D or N/E latched/unlatched
 - Mains fail N/E unlatched
 - All relays rated 5A/230vAC
- Relays Common**
- Alarms Lo, Hi, Fault Disable option
- Audible Alarm**
- Alarms Lo, Hi, Fault Disable option
- Standby Battery Module**
- 1 per System - 24vDC
 - Power-Green LED
 - High Battery Volts - Red LED
 - Low Battery Volts - Red LED
 - Charge Fail - Amber LED
 - Constant Voltage
 - 2A standard 7A option
- Indicators**
- 2A standard 7A option
- Charging Method**
- 2A standard 7A option
- Load Capacity @24v**
- 2A standard 7A option
- Miscellaneous**
- Screened 1.5mm²
 - Bridge - 1km
 - 4-20mA - 2.5km
- Sensor Cable**
- Screw type up to 2.5mm
- Field Terminals**
- 3U High (128mm)
 - 6E Wide (30mm) Depth (160mm)
- Module Dimensions**
- Operating Temp -10 to 50°C
 - Humidity 0 - 90 RH
- Environmental**

Alarm/Facilities/Stand-by Battery Charger – mother board field terminal connections

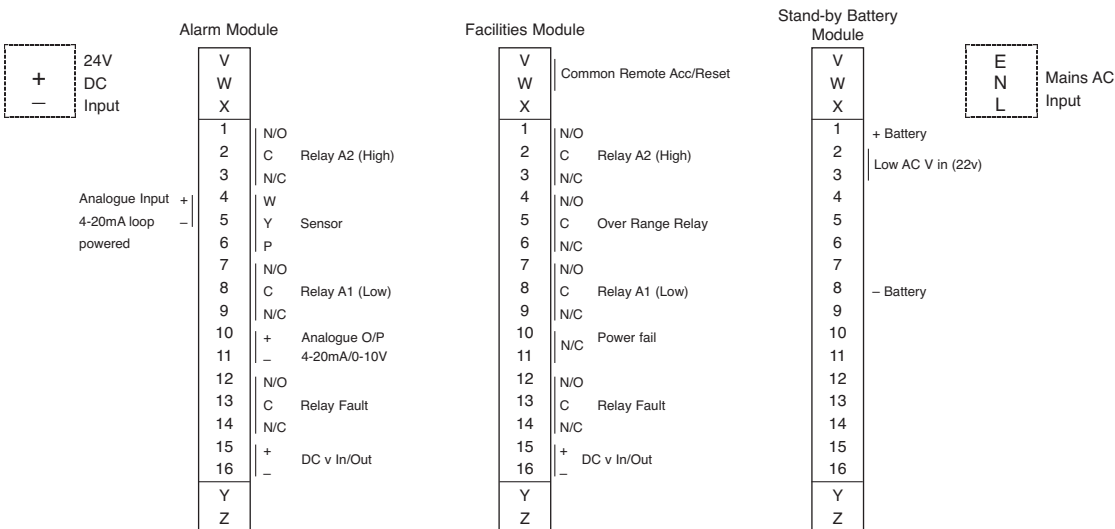

System Configuration

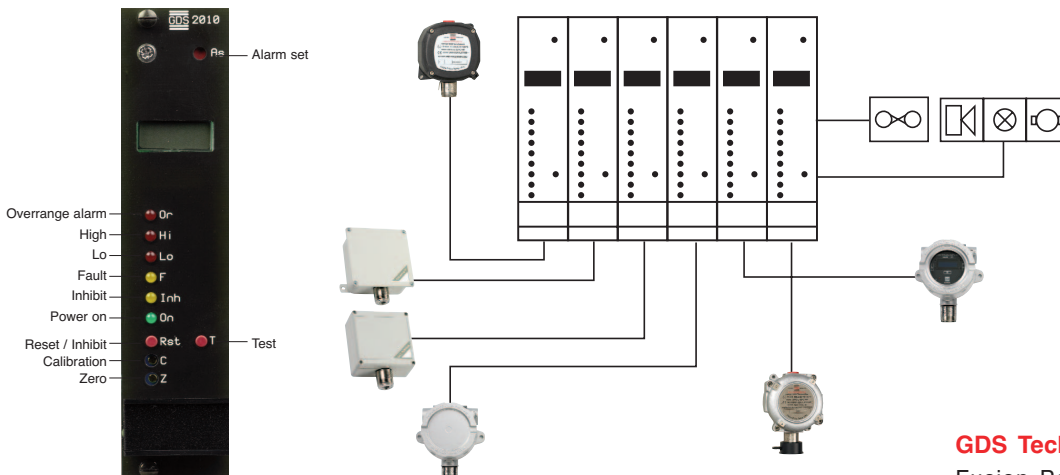

This document is not contractual and the equipment specification may be modified at any time without prior notice.

GDS Technologies Ltd
 Fusion Point, Ash Lane
 Garforth, Leeds LS25 2GA
 Tel +44 (0)113 286 0166
 Fax +44 (0)113 287 8178
 sales@gds-technologies.co.uk
 www.gds-technologies.co.uk

